



# iData K8Pro Cold

Ultra-low Temperature Resistant and De-condensation Intelligent Terminal

## Focus on improving worker performance in cold chain scenarios

iData K8Pro Cold is an ultra-low-temperature-resistant & de-condensation intelligent terminal that can meet all the requirements for long-time use in  $-30^{\circ}\text{C}$  environment, and the active heating can quickly eliminate the internal and external condensation of the scanning glass and screen. There are several versions with different button layouts, which can be selected according to the specific application requirements. In the operations of scanning and entering information, it can meet the work requirements of order recording, picking, and inbound/outbound management of cold storage, and can greatly improve the efficiency of workers.

### Meet the high standard of cold storage de-condensation and ultra-low temperature resistance standards

Workers in different areas of the high standard cold storage operation, equipment condensation will seriously affect the work. The active heating of scanning glass, screen and main unit, can quickly eliminate condensation, to ensure that quick scanning and recording after picking goods in cold storage. The dedicated  $-30^{\circ}\text{C}$  resistant cold-core batteries can meet the needs of low-temperature environment for long time use of cold storage.

### Improve worker cold storage fulfillment capability and accuracy

It can recognize the name, origin, weight and other information in GS1-EAN-UCC barcode, and automatically complete the weight counting and totalization of inbound/outbound storage management and inventory work, and support the scanning engine up to 21.4 meters, so that when the forklift is working, it can scan the barcode of the distant shelves/goods, and quickly recognize the shelves and confirm the information of the goods to be picked.

### Enhancing the Operational Input Experience for Worker Cold Storage Operations

Wearing heavy cold-proof gloves will bring inconvenience to the workers, the appropriate key size and keyboard layout will effectively reduce the rate of mis-touching when fulfilling the order, and the wide groove on the back and the texture design with the large strap will lock the device firmly in the hand, which is convenient for one-handed grip operation.



Fresh delivery



Cold storage management



Meat Deep processing



Vaccine and medicine traceability

# K8Pro Cold Technical Specifications

## System Configuration

Processor	Octa-core 2.45GHz high-performance processor
Operating System	Android 14.0
Memory (ROM+RAM)	64GB+4GB (standard)
SIM	Dual Nano SIM card
Expansion Slot	Micro SD card (up to 128GB)
Display Screen	4-inch, resolution: 800*480 IPS HD Retina screen
Touch Screen	Industrial capacitive screen, support wet-hand operation/glove mode/multi-touch/
Camera	13 megapixels of rear camera, support auto-focus/PDAF; 5 megapixels of front camera
Flashlight	800mA flashlight
Keypad	Version 1 has 34 keys: front key *29, side scan key *2, side volume ± key *2, side customize key *1; Version 2 has 43 keys: Front Side Key*38, Side Scan Key*2, Side Volume ± Key*2, Side Customize Key*1; Version 3 has 52 keys: Front Side Key*47, Side Scan Key*2, Side Volume ± Key*2, Side Customize Key*1;
Battery	3.85V lithium battery, with 5250mAh, detachable, backup-battery Support; Execution standard: GB31241-2022
Audio	Built-in dual microphone (noise-canceling microphone)
Charging Method	Type-C charging and bottom charger charging, support 18W fast charging
Reminder	High-power speaker/3 sides scan LED reminder/Vibration reminder/charging LED reminder
Vibration Motor	Built-in vibration motor
Sensors	Gravity sensor (G-Sensor), proximity sensor, light sensor (standard), geomagnetic sensor, gyroscope, barometer (optional)
Intercom Function (Optional)	Support one-button PTT calls

## Structure Parameter

Dimension (L*W*D)	205mm*76mm*31mm
Weight	458g (including the battery)

## Environmental Parameter

Working Temperature	-30°C - 50°C *Do not charge under low temperature conditions
Storage Temperature	-40°C - 70°C
Humidity	0 - 95% (no moisture condensation)
Drop Specification	Multiple drops to concrete floor from the height of 1.5m (without protective case) Multiple drops to concrete floor from the height of 1.8m (with protective case)
Roller Drop Specification	1000 times of roller drops from a height of 0.5 meter
Ingress Protection	IP68
ESD Protection	±15KV (air discharge), ±8KV (contact discharge)

## Scanning Engine

Barcode Type	It can scan one-dimensional / two-dimensional barcodes
Scanning Accuracy	≧ 3.33mil
Scanning Angle	Pitch: ± 60° ; Skew : ± 45° ; Tilt : 360°
View Angle	Horizontal : 44.3° , Vertical : 28.4° , Diagonal : 51°
Motion Error Tolerance	8m/s

## Communication Transmission

WWAN (Network Frequency)	2G : B2/B3/B5/B8 3G : B1/B2/B4/B5/B6/B8/B19 4G : FDD-LTE : B1/B2/B3/B4/B5/B7/B8/B12/B17/B19/B20/B28A/B28B/B66, TDD-LTE : B34/B38/B39/B40/B41
WWAN (Data Service)	GSM/GPRS/EDGE/UMTS/HSPA/HSPA+/WCDMA/TDD-LTE/FDD-LTE
WLAN Function	Wi-Fi 5(standard): Wi-Fi 802.11a/b/g/n/r/ac(dual-band Wi-Fi: 2.4G+5G), support fast roaming; Wi-Fi 6(optional): Wi-Fi 802.11a/b/g/n/r/ac/ax(dual-band Wi-Fi: 2.4G+5G), support fast roaming;
Bluetooth	Bluetooth 5.2, support BLE
GPS	GPS/AGPS/BDS/Galileo/GLONASS/QZSS

## NFC (Standard)

Working Frequency	13.56 MHz
Reading Distance	Within 40 mm
Communication Protocol	ISO14443A/14443B/15693

## Development Support

Programming Language	Java
Development API	iScan API (Scanning Development Kits), Device API (Device Management/Configuration Development Kits), Android Standard Interface
Development Tool	Eclipse/Android Studio

## Communication Interface

USB Interface	Type-C (with headset function) *1
OTG Interface	Support
Charging Interface	8-pin charging port

## Accessories

Standard Accessories	USB cable*1, hand strap *1, power adapter*1,device-back strap*1, battery*1
Optional Accessories	Power adapter(fast charging), 2-in-1 charging cradle, multifunctional 5-slot base, single charging cradle, bottom charger, 4-slot charging cradle, 4-slot battery charging cradle, pistol grip, protective case

The information of iData products and software service may be subject to change without notice. Please contact your SEWOO sales representative for the latest details.



Official Website

AROOT Co., Ltd.

Address: 475 N Martingale Rd #710 Schaumburg, IL 60173

E-mail: na\_sales@miniprinter.com

Website: www.miniprinter.com

Each product comes with a pack of practical and cost-effective accessories

## USB Cable

Type-C to USB cable, 1m in length, support charging and data transmission



## Hand Strap

Wear on your wrist to carry the device, avoid accidental drops, and assure the safety of equipment



## Device-back Strap

Attach on the device back to help you hold the device easily and firmly, avoid accidental drops



## Battery 5,250mAh (K8Pro Cold)

5,250mAh Detachable Li-ion Battery (Cold Chain Optimized)  
ps: comes with 1 battery, extra unit need to purchase



BAT-5.2K-K8PC-IBAT5KK8PC

## US 5V2A (10W) Power Adapter

Input voltage 100-240V, output 5V2A.  
5V / 2A (10W) US Power Adapter Body for Host Device  
ps: you may have one of the power adapters



PWR-5V2A-US-IPWR5V2AUS

Improve management efficiency of devices and operational level of enterprises

## 2-in-1 Charging Cradle

Device & Spare Battery Charging Cradle,  
5-Port Base Compatible,  
EU/UK/US Adapter Supported.



2N1-CRD-K8P-ICRD2N1K8P

## Battery 5,250mAh (K8Pro Cold)

5,250mAh Detachable Li-ion Battery (Cold Chain Optimized)

ps: comes with 1 battery, extra unit need to purchase



BAT-5.2K-K8PC-IBAT5KK8PC

## 5-Port Base for Cradle & Charger

5-Port Base for Centralized Charging & Accessory Management :  
Supports 2-in-1 Cradle and 4-Battery Charger \*5-port  
compatible models only\* (EU / UK / US / AU Supported)



BASE-5P-IBASE5P

The information of iData products and software service may be subject to change without notice. Please contact your SEWOO sales representative for the latest details.



Official Website

AROOT Co., Ltd.

Address: 475 N Martingale Rd #710 Schaumburg, IL 60173

E-mail: [na\\_sales@miniprinter.com](mailto:na_sales@miniprinter.com)

Website: [www.miniprinter.com](http://www.miniprinter.com)

Improve management efficiency of devices and operational level of enterprises

## Single Device Charging Cradle

Single Device Charging Cradle - US Plug  
EU/UK/US Adapter Supported

ps: you may have one of the power adapters



CRD-S-K8P-ICRDSK8P

## 4-Slot Device Charger

Charges up to four host devices at once, including units equipped with protective cases. (EU / UK / US / AU Supported)

ps: you may have one of the power adapters



CRD4-K8P-ICRD4DEVK8P

## 4-Slot Battery Charging Cradle

Charges up to four batteries at once, featuring independent charging slots to ensure efficient and stable power management. (EU / UK / US / AU Supported)

ps: you may have one of the power adapters



CRD4-BAT-K8P-ICRD4BATK8P

The information of iData products and software service may be subject to change without notice. Please contact your SEWOO sales representative for the latest details.



Official Website

AROOT Co., Ltd.

Address: 475 N Martingale Rd #710 Schaumburg, IL 60173

E-mail: [na\\_sales@miniprinter.com](mailto:na_sales@miniprinter.com)

Website: [www.miniprinter.com](http://www.miniprinter.com)

## K8Pro Cold Optional Accessories for Portability

Accessories Guide

Improve device portability and comfort for users, boost working efficiency

### Pistol grip Only for K8Pro

Available as a bundled option with the device  
or as a separate accessory for future installation.



PG-K8Pro-IPGK8P


## K8Pro Cold Optional Accessories for Protection

Accessories Guide

Lower risks of malfunction during usage, extend lifespan of devices

### Protection Cover for K8Pro/K8Pro Cold

Enhance fall protection performance  
K8, K8Cold series universal

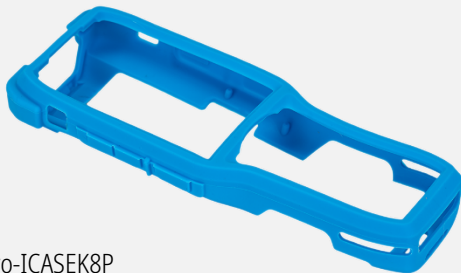

CASE-K8Pro-ICASEK8P

The information of iData products and software service may be subject to change without notice. Please contact your SEWOO sales representative for the latest details.



Official Website

AROOT Co., Ltd.

Address: 475 N Martingale Rd #710 Schaumburg, IL 60173

E-mail: [na\\_sales@miniprinter.com](mailto:na_sales@miniprinter.com)

Website: [www.miniprinter.com](http://www.miniprinter.com)